





KADNAR GROUP













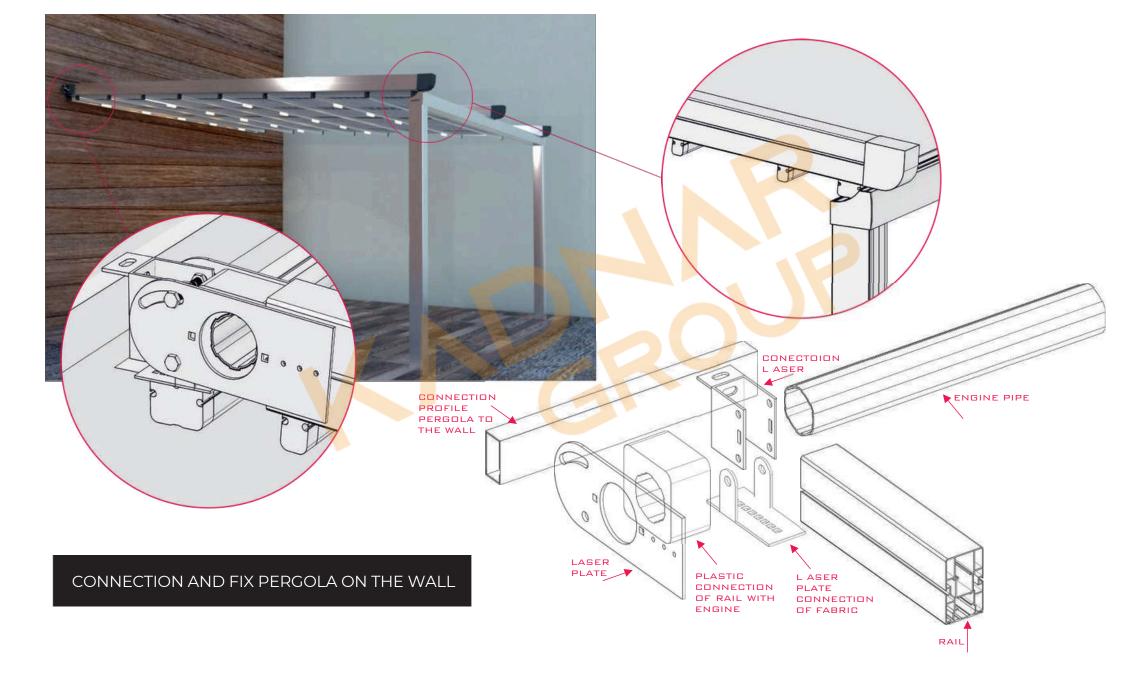







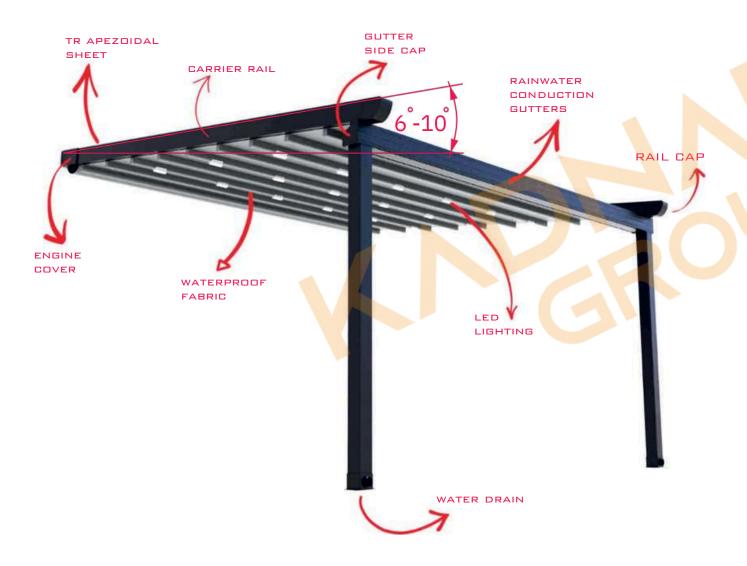











COLOR CUSTOMIZATION

YOU CAN CHOOSE THE COLOR YOU LIKE ACCORDING TO THE BULDING

FABRICS TESTING **TEST METHOD** PES Base Fabric Coating PVC 1000x1000 Yarn (Denier) Weaving 10×10 Total Weight (gsm) TS 251:1991 METOT 6 Width (cm) 250, 300, 320 TS 2008 EN ISO 1421:2000 Tensile Strength (N/5 cm) METOT 1 2300/2400 (Warp/Weft) 330/280 (Warp/Weft) Tear Resistance (N) DIN 53363 Adhesion (daN/5 cm) EN ISO 2411 ISO 105 B04:1994 Light Fastness Water Resistance TS 257 EN 20811:1996 Min. 8000 (mmSS) Min. 9000 Rotation TS EN 530:2011 -40C +70C Temparature Resistance Flame Reterdancy DIN4102-B2, ISO 6941:2003 PASS

May 1000 May 1001 May 2000 May

FABRIC COLORS

ALUMINUM COLORS





















KADNAR GROUP





